

NOTES: UNLESS OTHERWISE SPECIFIED


1. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.

2. ALL DIMENSIONS ARE IN INCHES [MM].

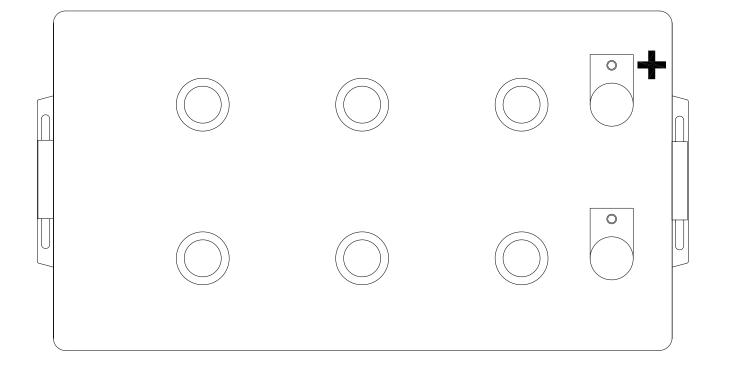

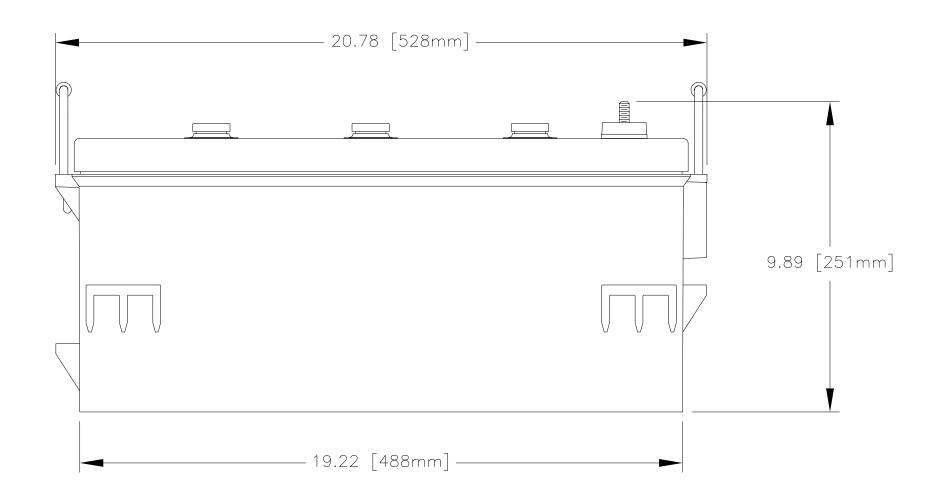

CAPACITY RATINGS									
PART NUMBER	CB12200								
NOMINAL WEIGHT (LBS)	158 WET/119 DRY								
COLD CRANKING AMPS @ 0°F (-18° C)	1375								
RESERVE CAPACITY 1.75 VOLTS/CELL @ 77°F (25° C)	528								

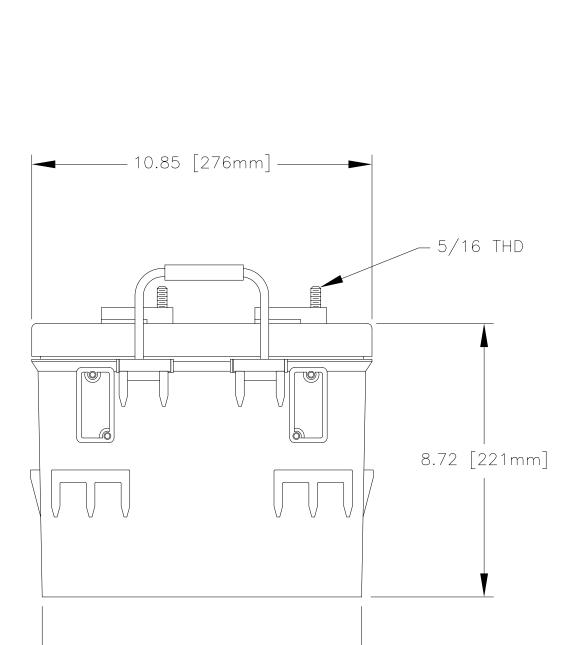

REVISIONS

DATE

APPROVED

DESCRIPTION

REV

ENVELOPE DRAWING

——— 10.18 [259mm] ——**→**

QTY REQD	CAGE CODE	PART (IDENTIFYIN					ENCLATURE DESCRIPTION			MATERIAL SPECIFICATION		
					PAR	TS LIS	ST		·			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.				CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790						
110.0110113	.XX ± .12		APPR	DATE	BATTERY, 12 VOLT,							
	.XXX ±	.125	DRAWN	RM	11/4/03			<i>></i>	CB12		_ ,	
TREATMENT	Ν	ONE	CHECKED	AMIII	6/21/07	SIZE	CAGE CODE		DWG NO.	200		REV
FINISH	N	ONE	APPROVED	JBT	6/21/07	C	630)17	5W0 NO.	CB122	200	
SIMILAR TO	A	CT WT CALC WT	ISSUED	NS	6/22/07	SCALE	NONE			SHEET	1 OF	1