

NOTES: UNLESS OTHERWISE SPECIFIED




1. MANUFACTURED AND INSPECTED IAW AS9100 QUALITY SYSTEM REQUIREMENTS.

2. ABBREVIATION USED IN TITLE IS: VALVE REGULATED SEALED LEAD ACID (VRSLA).

3. SEE DRAWING NUMBER CB-00277 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTIONS. PROCEDURE AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
4. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 60952-1 AND RTCA STANDARD DO-293, UNLESS OTHERWISE NOTED.

5. DIMENSIONS ARE IN INCH [MILLIMETERS].

6. "FIRE RESISTANT" EXTERNAL CONTAINER AND COVER.

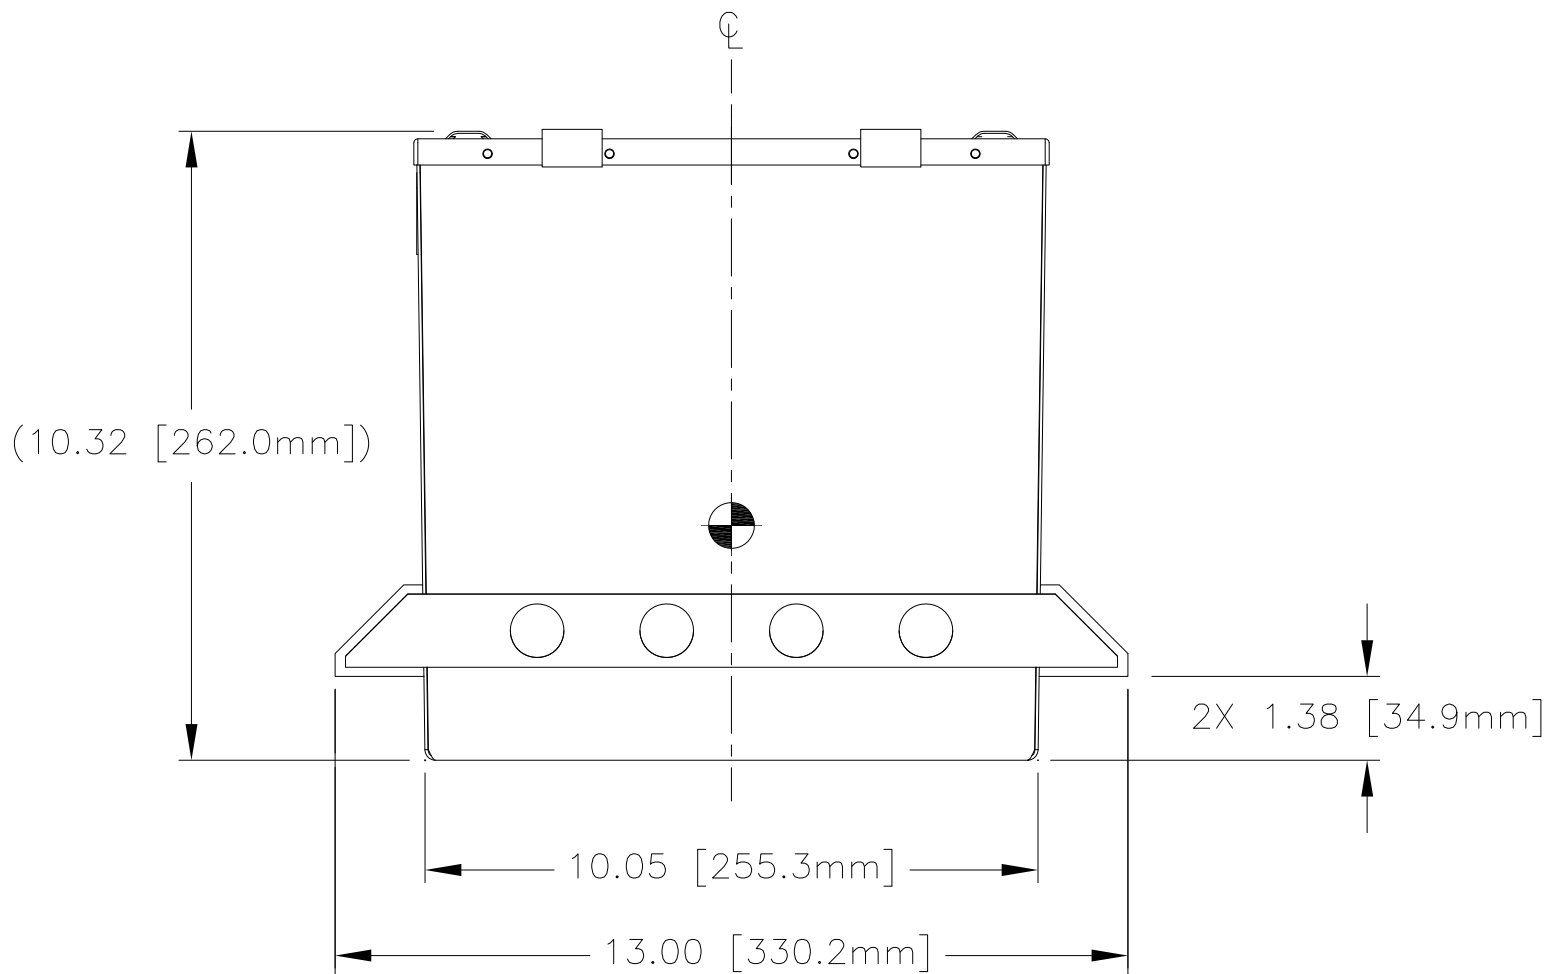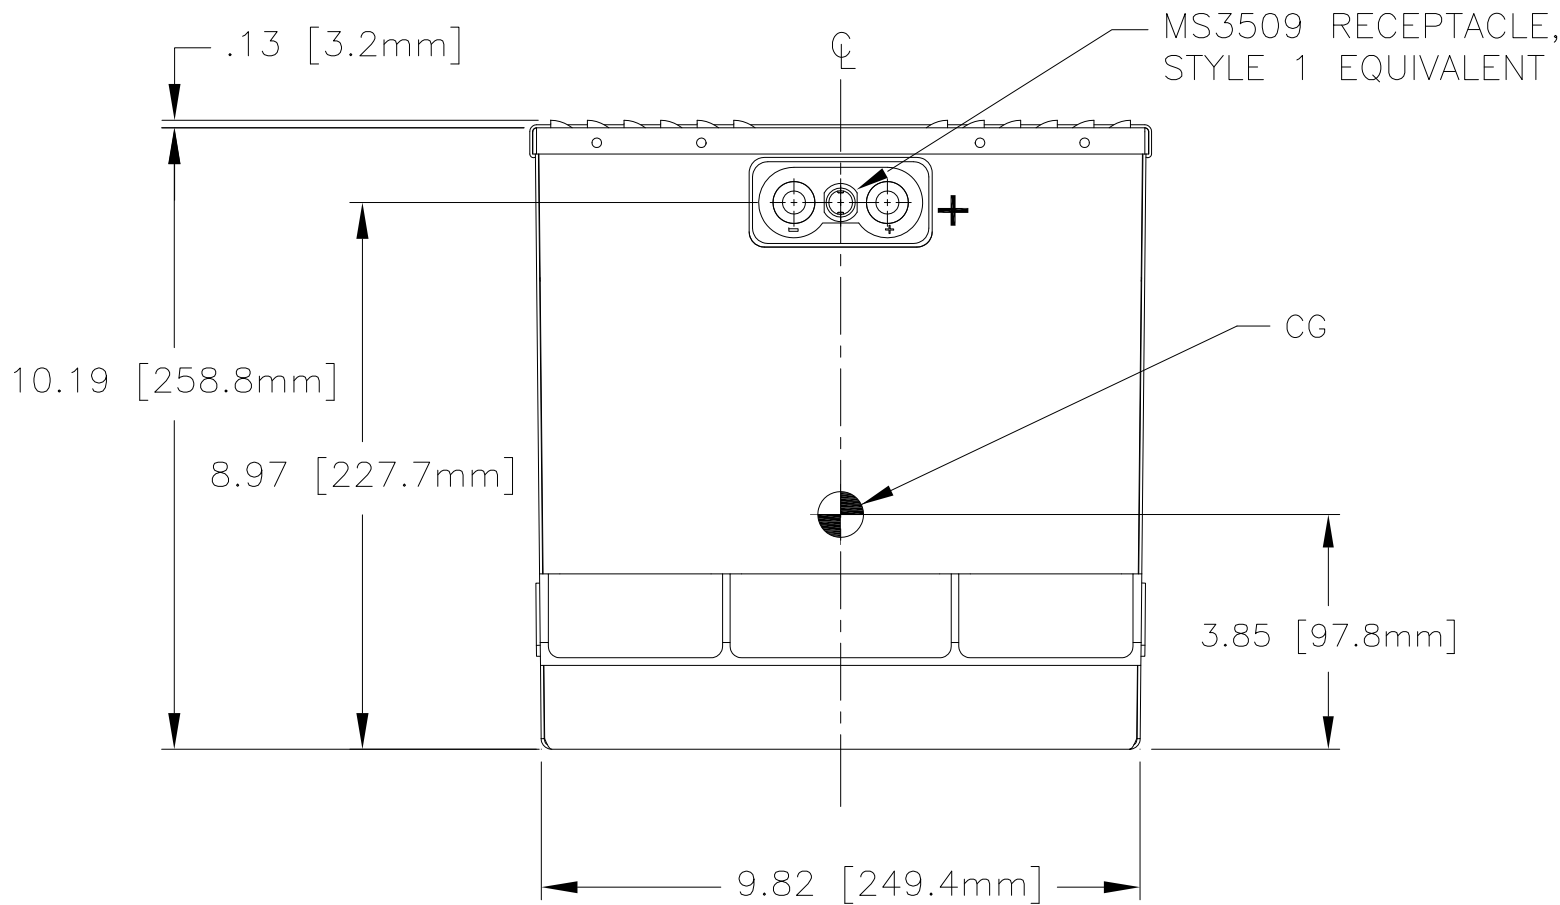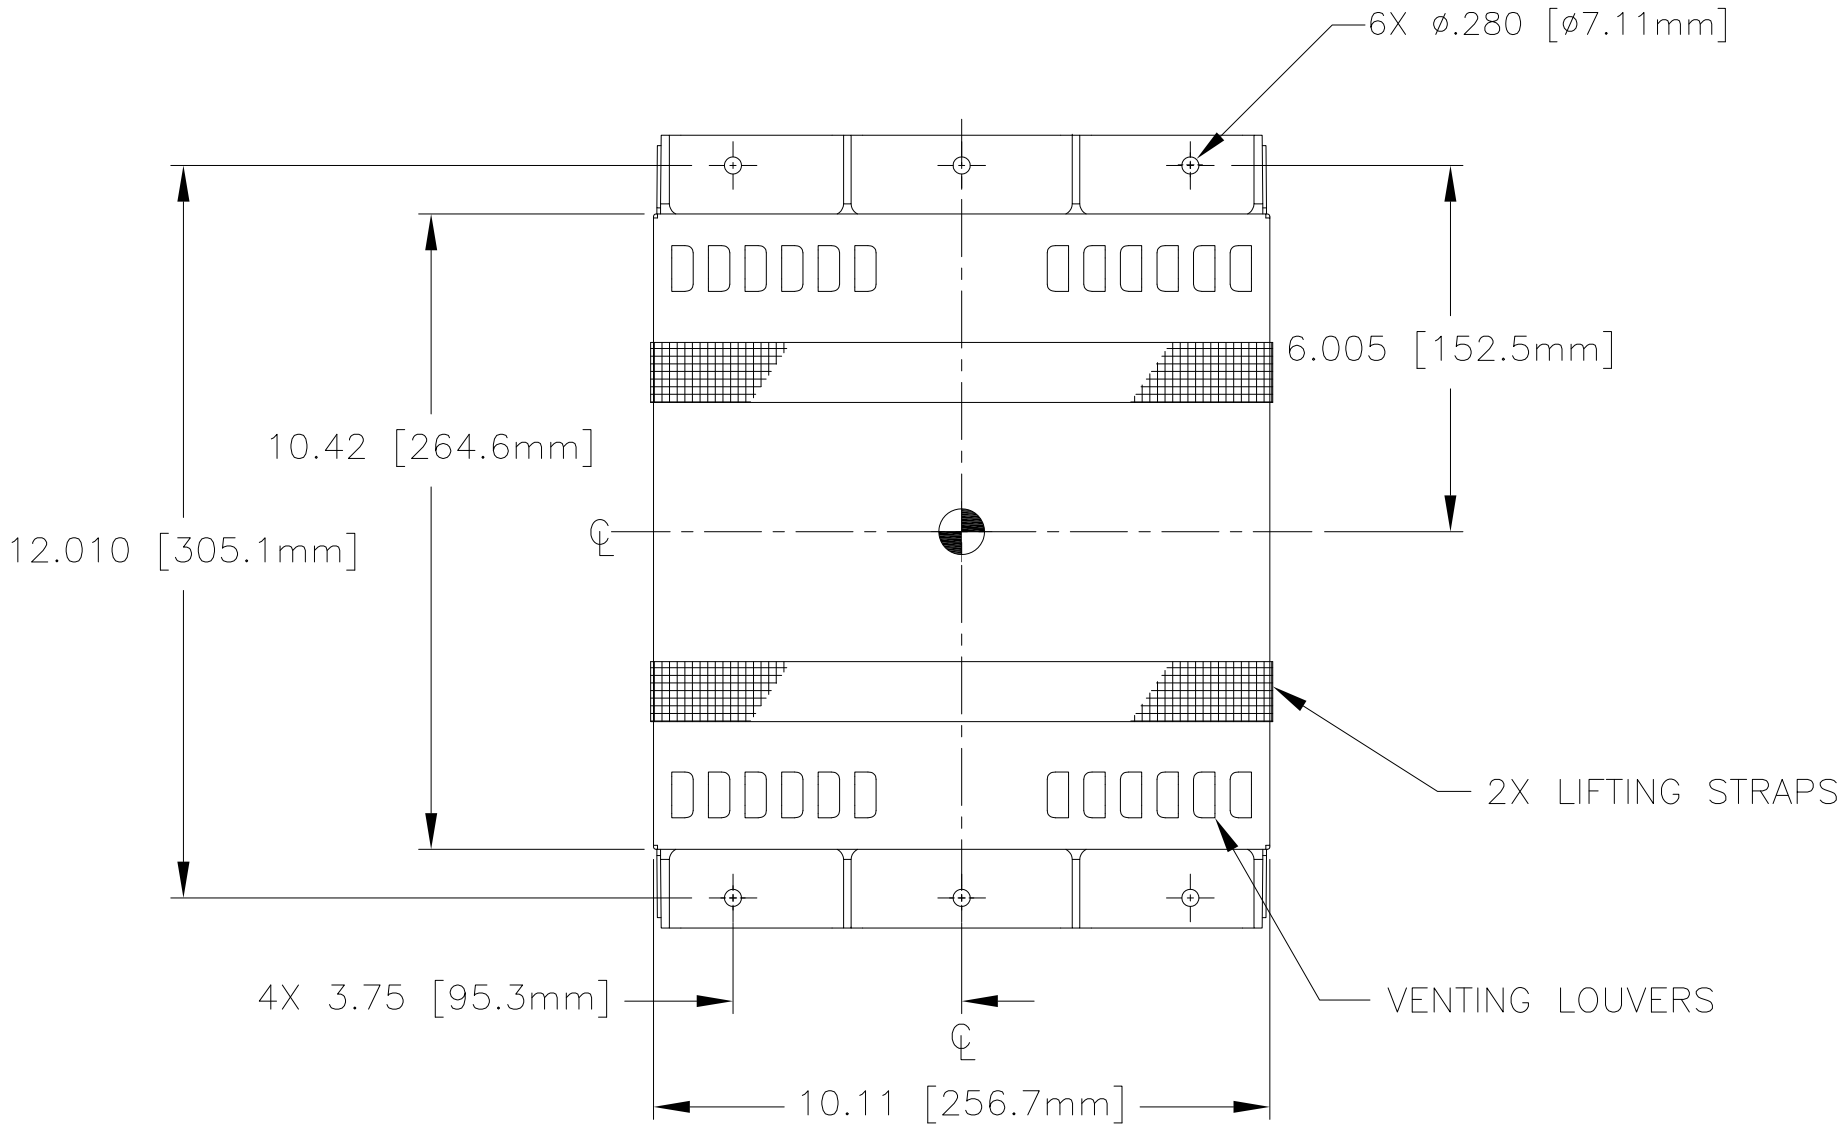

ENVELOPE DRAWING

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION			ITEM NO.
QTY REQD		PARTS LIST									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  FRACTIONS    DECIMALS    ANGLES  ±1/32    .XX    ±.06    ±1°  .XXX    ±.030				CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790					
				APPROVALS		DATE	TITLE  BATTERY, VRSLA, 24 VOLT, 48 AH				
				DRAWN	JBT	8/19/99					
				TREATMENT		NONE	CHECKED	AMIII	11/12/99		
FINISH		NONE	APPROVED	JBT	11/16/99	SIZE	CAGE CODE	DWG. NO.		REV	
SIMILAR TO		ACT WT	CALC WT	ISSUED	BJ	9/22/14	C	63017	RG-380E/60B		D
						SCALE	NONE		SHEET	1 OF 1	