
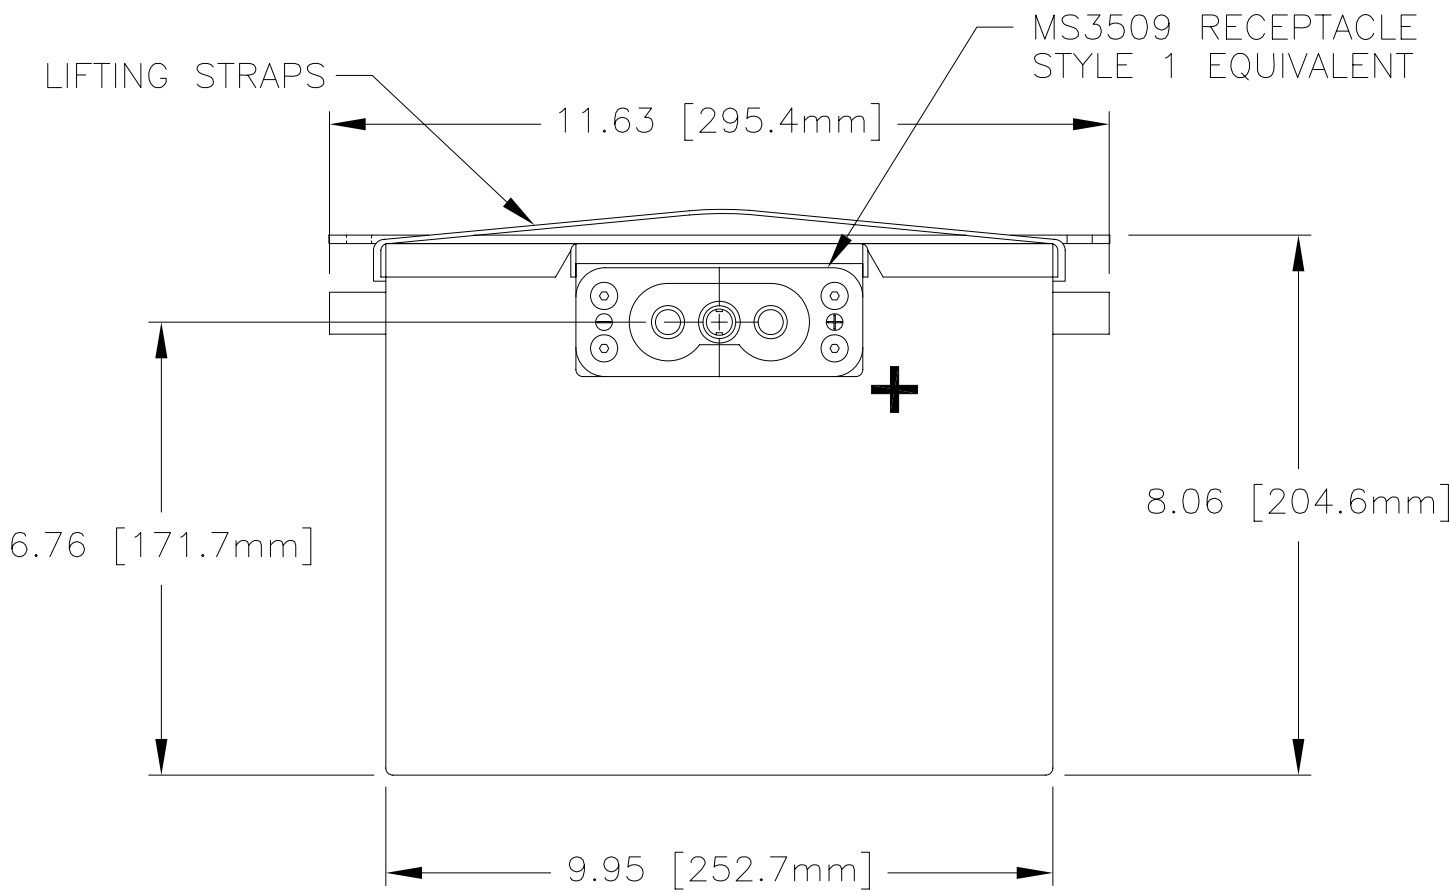
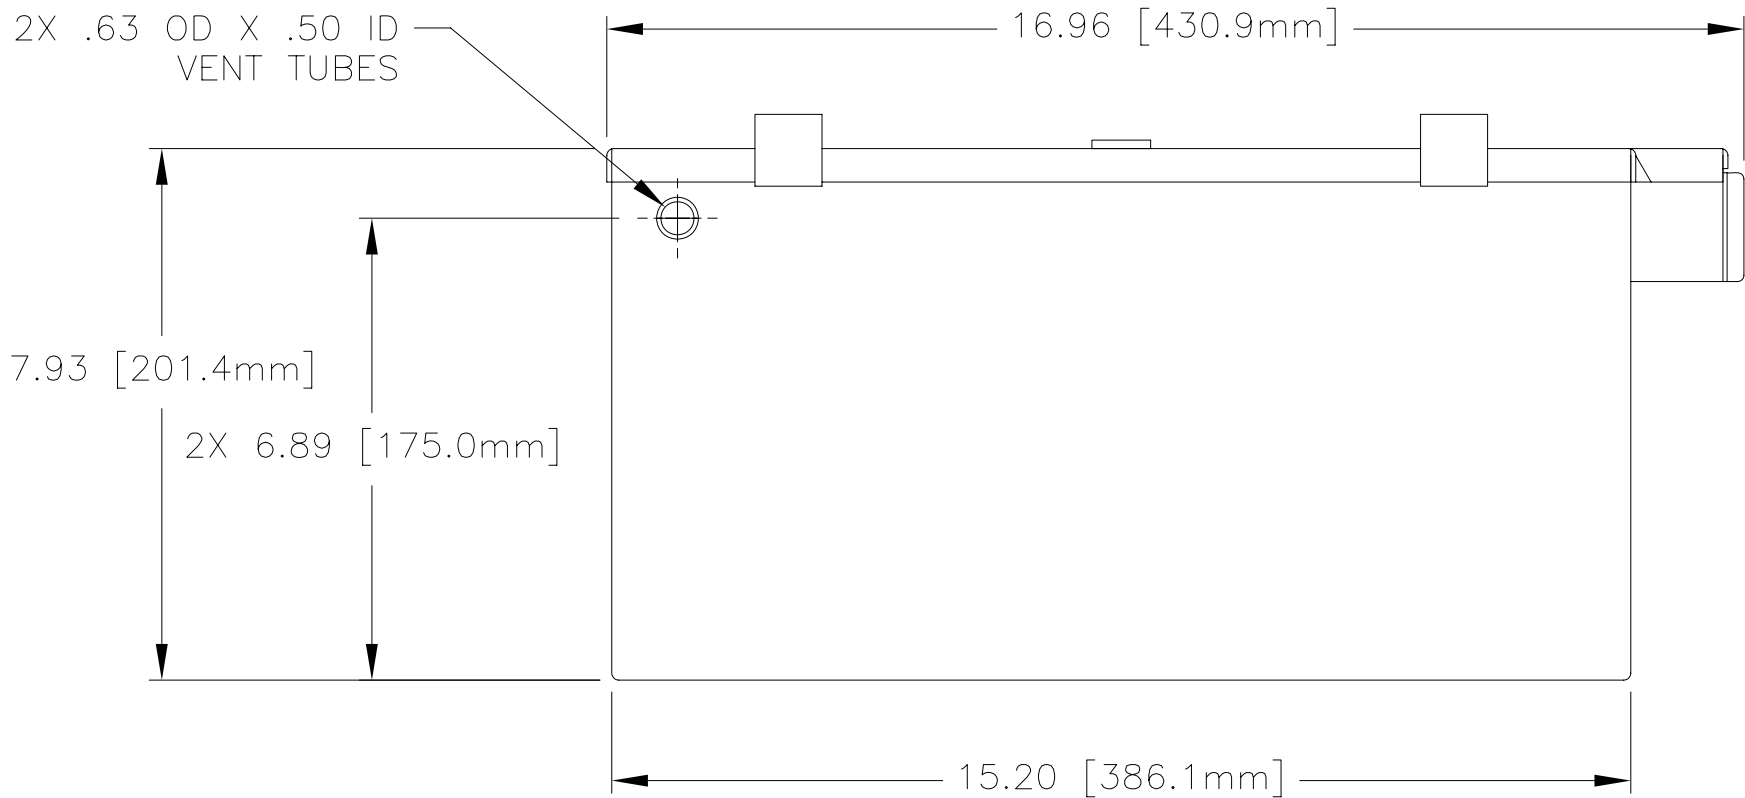


- NOTES: UNLESS OTHERWISE SPECIFIED
1. MANUFACTURED AND INSPECTED IAW AS9100 QUALITY SYSTEM REQUIREMENTS.
 2. ABBREVIATION USED IN TITLE IS: VALVE REGULATED SEALED LEAD ACID (VRSLA).
 3. SEE DRAWING NO. CB-00245 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
 4. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 60952-1 AND RTCA STANDARD DO-293, UNLESS OTHERWISE NOTED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

PART NUMBER	RG-76
MAXIMUM WEIGHT	99 LBS [44.9 KG]
RATED CAPACITY, C ₁	44 AH
POWER RATING AT 23°C	lpp 1997 A, lpr 1678 A
POWER RATING AT -18°C	lpp 1410 A, lpr 1230 A
POWER RATING AT -30°C	lpp 1130 A, lpr 760 A

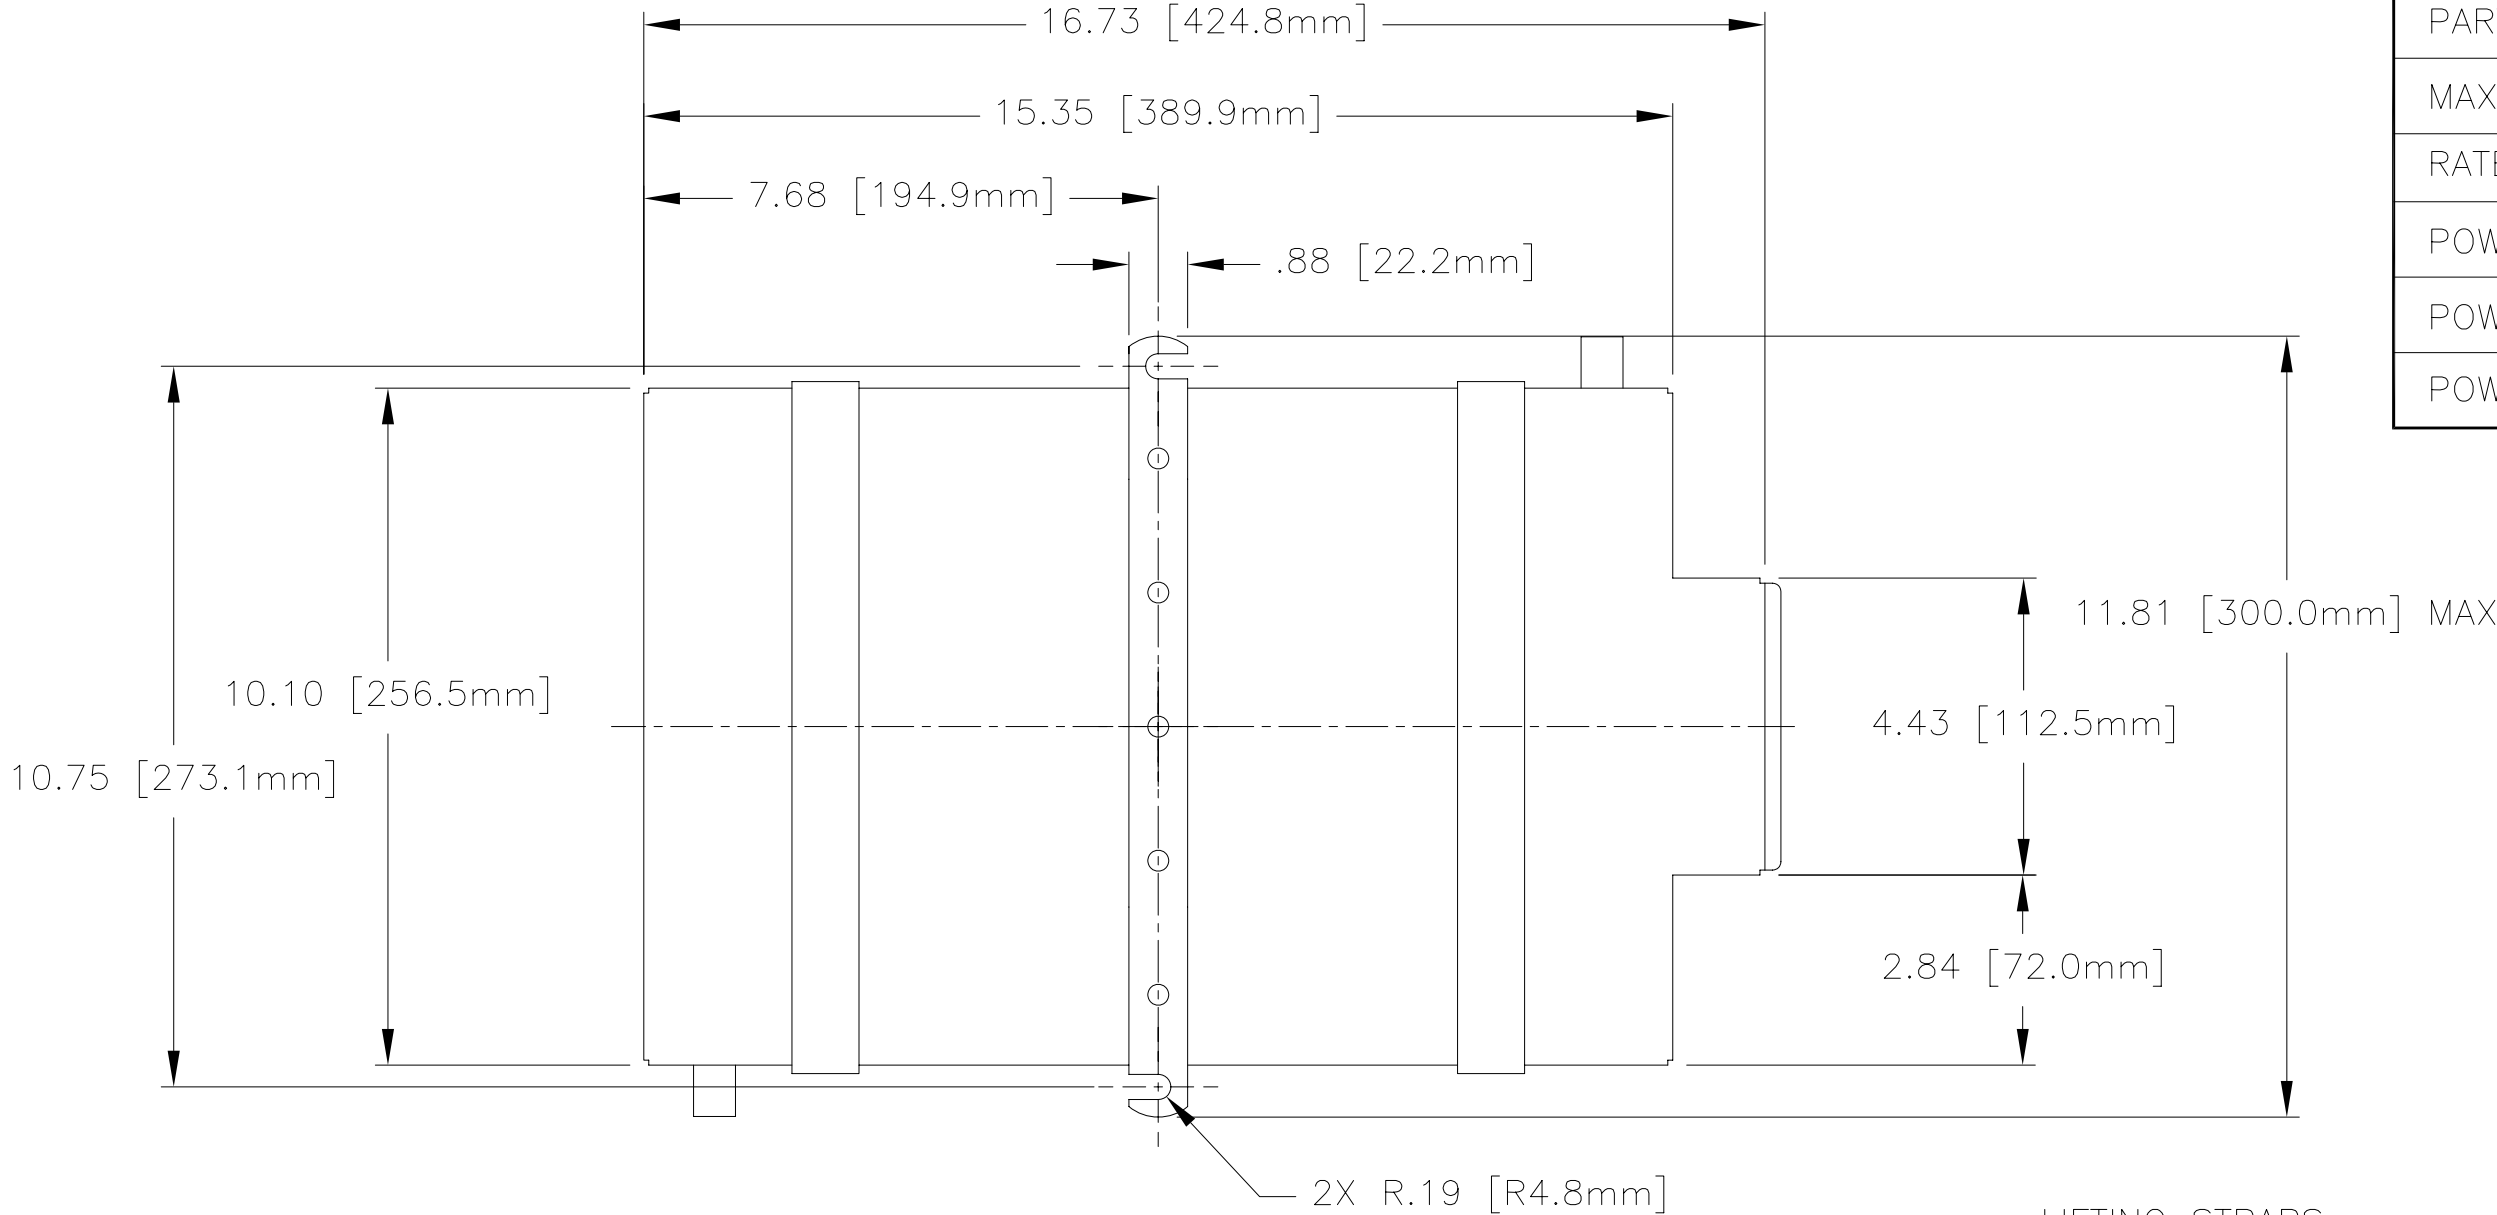

ENVELOPE DRAWING

		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION			MATERIAL SPECIFICATION			ITEM NO.
QTY REQD		PARTS LIST									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX ± .06 .XXX ± .060			CONTRACT NO.			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790					
			APPROVALS		DATE	TITLE					
			DRAWN	D. AYALA	6/30/10	BATTERY, VRSLA, 24 VOLT					
			TREATMENT		NONE	CHECKED	AMIII	6/30/10	SIZE	CAGE CODE	DWG NO.
FINISH		NONE	APPROVED	JBT	6/30/10	C	63017	RG-76			
SIMILAR TO		ACT WT	CALC WT	ISSUED	JJ	6/30/10	SCALE	NONE	SHEET	1 OF 1	